

Inkjet Printing

Inline, online, integrate, with base, table-top...yours or ours!

Product Specifications

• Print Head Specifications

Inkjet Technology	- Thermal																								
Printer Controller	- Integrated in print head																								
	- buffers up to 7 pages																								
	- Real-Time clock supports accurate date/time printing																								
Print Cartridge Type	- Lexmark-compatible																								
Number of Cartridges	- 1-4																								
Print Cartridge Configurations	- Staggered (to increase height)																								
	- In-line (to print multiple colors)																								
Print Resolution	- Configurable to 600 x 600 dpi																								
Cartridge to Media Spacing	- 3mm or less																								
Max Print Width	- 2.0" (4 staggered pens)																								
Max Print Length	- 700.0"																								
Max Print Heads	- 8																								
Ink Source	- Standalone cartridges or bulk-supplied cartridges																								
Ink Types	- Water-based, Solvent-Based																								
Ink Colors	- Black, Spot Color																								
Software Interface (USB Imager)	- XiJet Composer application																								
	- FlexSystems FlexMail application																								
	- Customer-supplied application communicating via XiJet																								
	Windows API																								
Print Head Configurations	- USB Imager Mode																								
	- Serial Printer Mode																								
Other Features	- Off-line Printing																								
	- Automatic pen-deactivation																								
Max Transport Speed	- <table border="0"> <tr> <td><u>Resolution</u></td> <td><u>Speed</u></td> <td></td> <td></td> </tr> <tr> <td>600x600</td> <td>200ft/min</td> <td>61m/min</td> <td></td> </tr> <tr> <td>600x200</td> <td>600ft/min</td> <td>183m/min</td> <td></td> </tr> <tr> <td>300x300</td> <td>400ft/min</td> <td>122m/min</td> <td></td> </tr> <tr> <td>300x200Fast</td> <td>1200ft/min</td> <td>365m/min</td> <td></td> </tr> <tr> <td>300x100Fast</td> <td>2400ft/min</td> <td>732m/min</td> <td></td> </tr> </table>	<u>Resolution</u>	<u>Speed</u>			600x600	200ft/min	61m/min		600x200	600ft/min	183m/min		300x300	400ft/min	122m/min		300x200Fast	1200ft/min	365m/min		300x100Fast	2400ft/min	732m/min	
<u>Resolution</u>	<u>Speed</u>																								
600x600	200ft/min	61m/min																							
600x200	600ft/min	183m/min																							
300x300	400ft/min	122m/min																							
300x200Fast	1200ft/min	365m/min																							
300x100Fast	2400ft/min	732m/min																							

Americas and Asia

Postmark Inc
3197 Duncan Lane - Suite A
San Luis Obispo, CA 93401, USA
Phone: (805) 594-1454
Fax: (805) 594-1455
E-mail: postmark@postmark-usa.com
Web: www.postmark-usa.com

EMEA Countries

Postmark Aps
Pakhusgaarden 10
5000 Odense C, Denmark
Phone: + 45 65 910 190
E-mail: postmark@postmark.dk
Web: www.postmark.dk

POSTMARK

20160701CE

Inkjet Printers

Re-Invented



Powered by XiJet
with



POSTMARK


Re-Invented

Inkjet Printers


Inkjet Printing

Inline, Online and Integrate


You Decide!

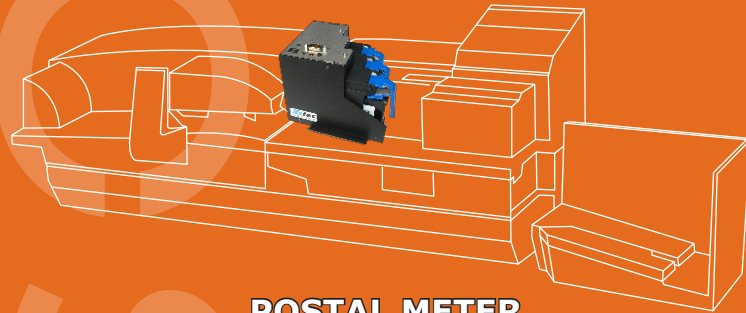

POSTAL METER

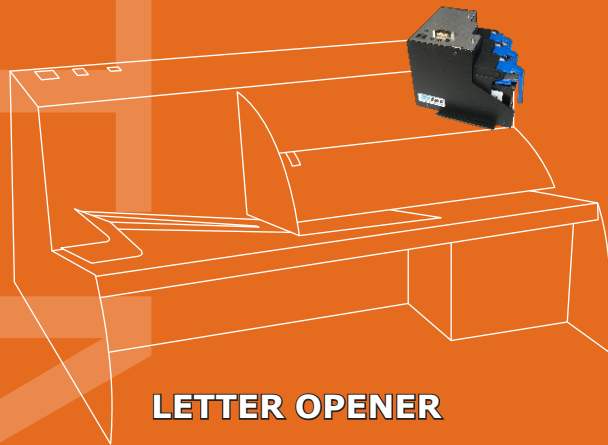

LETTER OPENER

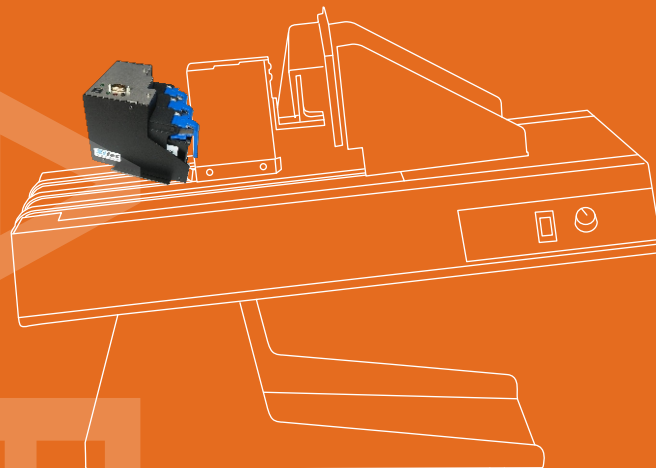

SMALL BASE




Cartridges fit any base...
your imagination is the only limit!

- Up to 80,000 postcards/addresses an hour
- Up to 600 DPI printing quality
- PC interface and software
- Low cost "plug-in" solution


Powered by XiJet
with




POSTMARK

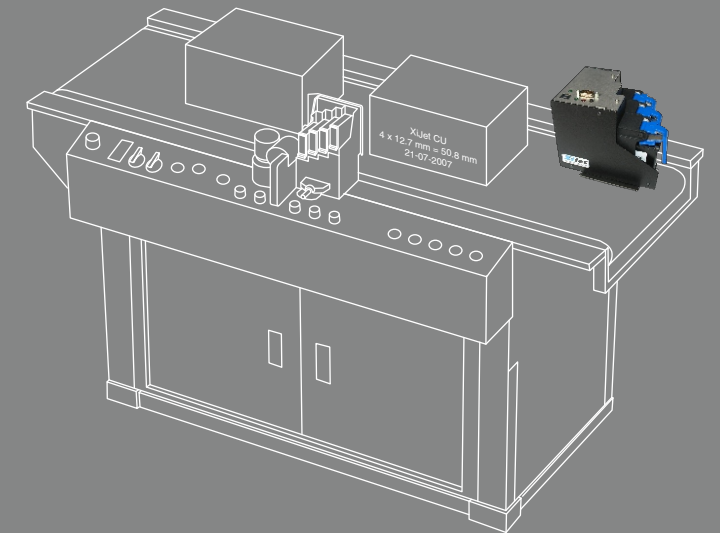

PACKAGING LINE

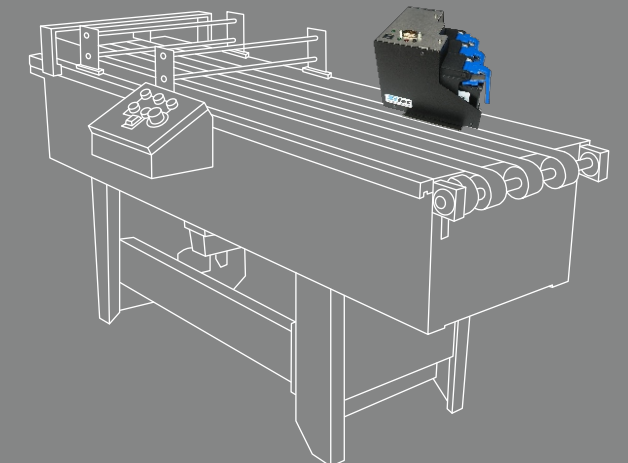

VACUUM BASE

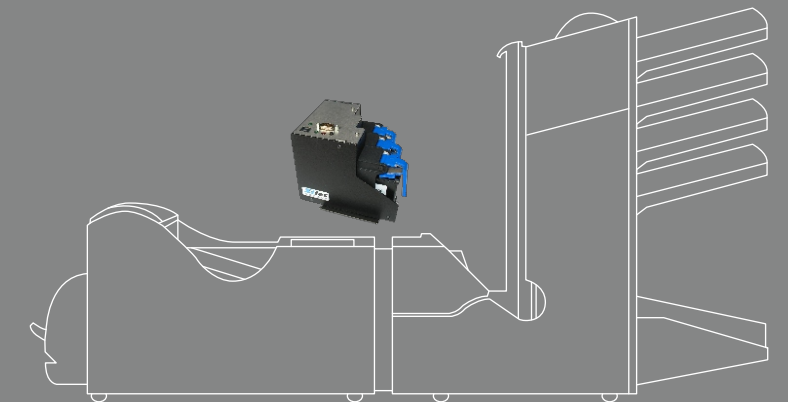

INSERTER